


**MONARCH 540 TVL**

**AM-N5465-VMR1**

**3 Axis Day/Night IR Varifocal Vandal Dome CAMERA**

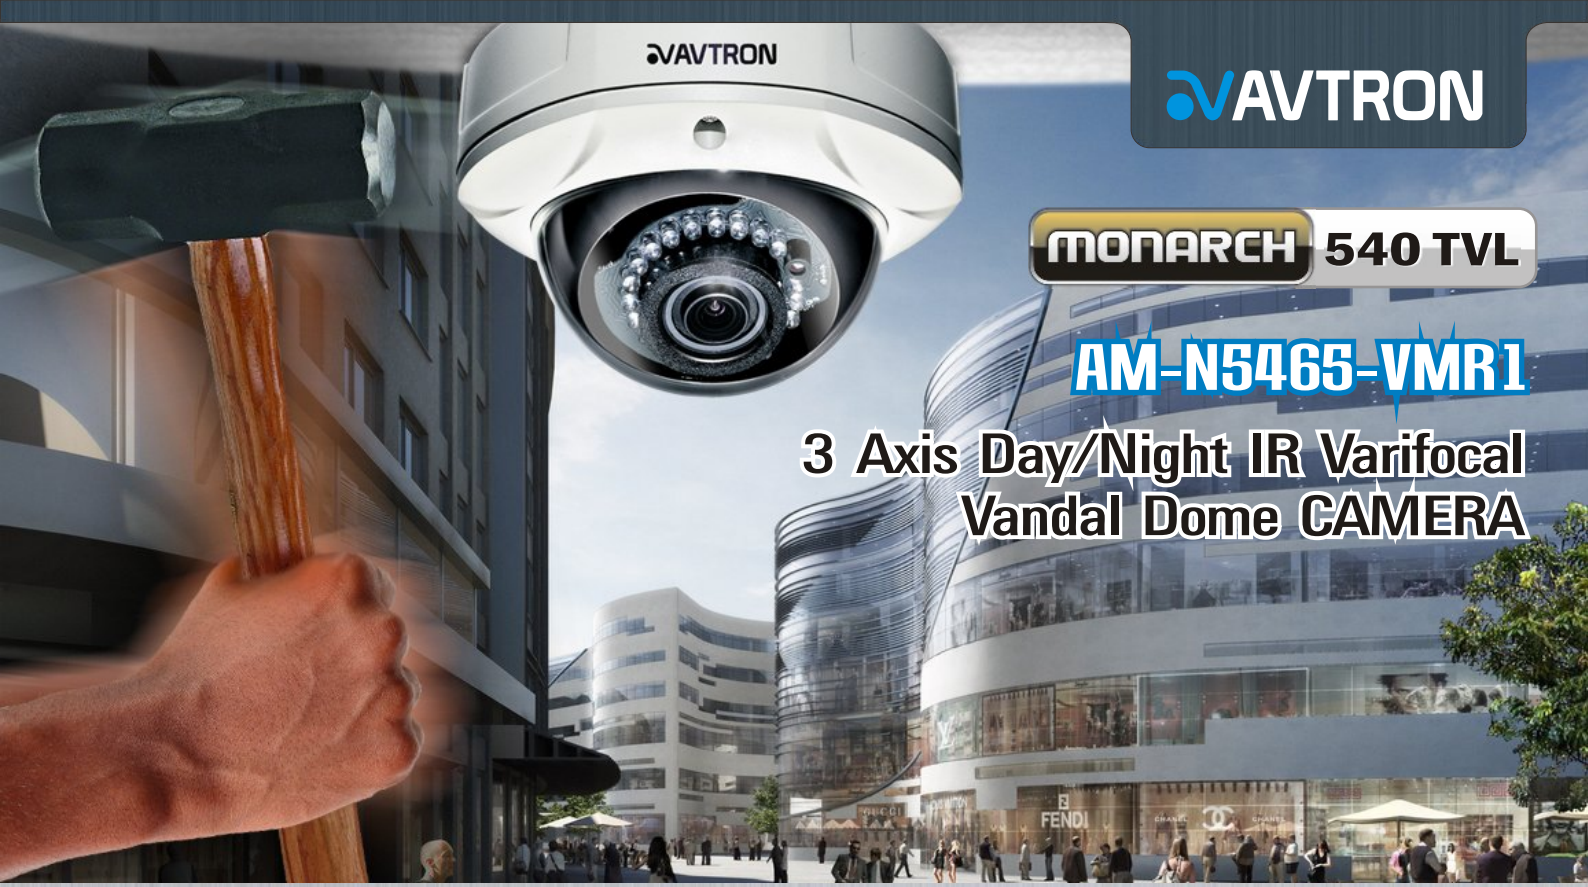

**Superior Engineering Design & Sensational Image Quality**

**AM-N5465-VMR1**


**3 Axis Day/Night IR Varifocal Vandal Dome CAMERA**

**Features :**

- 1/3" Sony Super HAD II Image Sensor
- Super High 540TVL at Color, 570TVL at B/W
- True & Soft Day/Night for all 24/7 Surveillance mode
- Support Customization Area for BLC
- High Intensity 18IR LED Night Vision up to 15 to 18M
- Varifocal 2.8 to 10mm Auto Iris Lens with ICR
- Low Illumination 0.15Lux with noise free image
- Programmable Shutter & Exposure Mode Auto, Flicker, Manual
- OSD Menu Control for easy & user friendly Customer Ease
- Motion Detection, Privacy Masking, Camera ID
- Support 12VDC/24VAC Power
- 3 Axis Vandal Resistant Aluminum & Poly-Carbonated Dome Enclosure
- Support IP66 Protection Grade for Direct Outdoor Installation with Heater Function (Heater Optional)



**Dimension :**

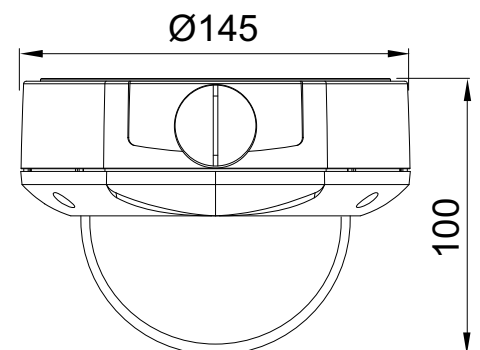

## Specifications :

Model	AM-N5465P-VMR1	AM-N5465N-VMR1
Signal System	PAL	NTSC
CCD Type	1/3" Super HAD II IS	
Effective Pixels	752(H) x 582(V)	768(H) x 494(V)
Scanning Frequency	H : 15.625 KHz V : 50 H	H : 15.734 KHz V : 60 Hz
Horizontal TVLine Resolution	More Than 540TVL	
Day/Night	Color / B&W / Auto	
Lux Level(illumination)	0.15Lux at 40 IRE @ F1.2 @ Color , 0 Lux @ IR LED ON	
IR LED	18pcs 0.5mm	
IR Wave Length	850~880nm Infrared	
IR Distance	up to 15 ~ 18Meter	
Gamma	Auto/ Adjustable 0 to 1.0(Default 0.45)	
Gain Control(AGC)	On / Off	
White Balance	ATW / AWB / FIXED / MANUAL	
Light Compensation	ON / OFF with 64 Adjustable Zones	
Lens	2.8 to 10MM DC Auto IRIS VarIFocal with ICR	
Camera ID Name	On/Off	
Privacy Masking	Up to 4 Adjustable Zones	
OSD Menu Control	Yes	
Motion Detection	On/Off Selectable, up to 64 Adjustable Zones	
Mirror Control	Yes	
Image Control	Brightness, Contrast, Sharpness, Red Gain, Blue Gain	
S/N Ratio	50dB @ AGC Off	
Shutter Speed Control	AUTO(1/50s, 1/60s-1/120,000s) / FIXED / FLK / Manual	
Synchronous System	Internal/Line Lock Selectable	

## Specifications :

Video output	1.0Vp-p, 75Ω, BNC
Power Supply	DC 12V ± 10%, DC
IP Protection	IP 66
Power Consumption	<130mA @ 12VDC, 180mA @ 24VAC
Operating Temperature	-10°C ~ + 50°C
Operating Humidity	30% ~ 90% RH
Dimensions(WxDxH)	145 mm (W) x 145 mm (D) X 100 mm (H)
Weight (g)	390 g
Enclosure	3 Axis Bracket, Aluminum & Poly-Carbonated with Vandal Resistant

\* Product specifications and appearance may be changed without prior notice due to improvements.



Scan with your  
Smart phone for  
more information

**AVTRON**

<http://www.asi.ind.in>