


DS-2CC5112P/5172P Dome Camera

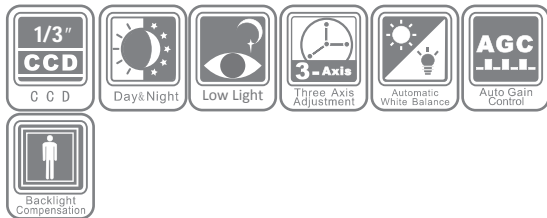

Key Features

- High performance Sony CCD
- Low illumination
- Day / night auto switch
- 3-axis adjustment
- Compact design

Specifications

	DS-2CC5112P	DS-2CC5172P
Camera		
Image sensor	1/3" Sony Super HAD CCD II	
Signal system	PAL	
Effective pixels	752 (H) × 582 (V)	
Min. illumination	0.1 lux@F1.2, AGC on 0.28 lux@F2.0, AGC on	
Shutter time	1/50s ~ 1/100,000s	
Lens	3.6mm @F2.0 (2.8mm, 6mm, 8mm, 12mm, 16mm optional) Angle of view: 78° (3.6mm)	
Lens mount	M12	
Angle adjustment	Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°	
Day & night	Electronic	
Horizontal resolution	480 TVL	540 TVL
Synchronization	Internal synchronization	
Video output	1Vp-p composite output (75 Ω / BNC); Test monitor out [1Vp-p composite output (75 Ω / BNC), device line]	
S/N ratio	More than 52dB	
General		
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)	
Power supply	12 VDC ± 10%	
Power consumption	2W max.	
Dimensions	Φ 97.8 x 64.4mm (Φ 3.85" x 2.54")	
Weight	300g (0.66 lbs)	

Available models

DS-2CC5112P, DS-2CC5172P

Dimensions

