




Pioneers in Securities



4" Speed Dome 10X Indoor IR S-SD4-10 IR / S-SD6-10 IR

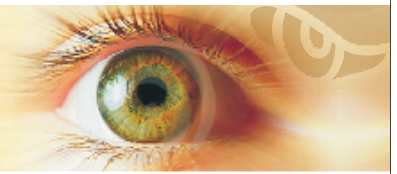


FEATURES

- 10x Optical Zoom, 10x Digital Zoom • Vector Drive and Micro-Stepping Technology make more smooth rotation and accurate preset • Compound Movement make the speed dome reach preset in shortest route • 100 presets, horizontal turning speed reaches 250°/sec. • Continuous turning with no blind area • Perfect Solution for Day / Night Applications • High Sensitivity SONY EFFIOP Technology CCD Sensor • Adopt "Special Optical Low Pass Filter" • High Efficiency IR LED • Automatically Activates LED : Below 10 Lux • High Sensitivity Sensor, Excellent Picture Quality • IR Cut Filter, Auto Color & Mono Switching in low light • Optional Ceiling Mount



| Model | S-SD4-10 IR | S-SD6-10 IR |
|-------------------|--|------------------------------------|
| Sensor | 1/4" CCD Sony EFFIOP Technology | |
| Signal Modes | System PAL NTSC | |
| Resolution | 480 TVL | 650 TVL |
| S/N | 8.59 pt | |
| Zoom Ratio | 10x Optical zoom | 10x Optical zoom, 10x digital zoom |
| Focal Length | 3.8 - 38 mm | |
| Iris | Iris F1.6(Wide)-F4.5(Tele) | |
| Mini Illumination | Color : 0.5 lux , B/W : 0.2 lux Color DSS : 0.001 lux , B/W DSS : 0.0004 lux | |
| Day / Night | Auto / Day / Night | |
| Focus | Auto / Manual / Semi-Auto | |
| Iris Adjustment | Auto / Manual | |
| Shutter Speed | Auto (x128 ~ 1/50 sec. ~ 1/10,000 sec.) Auto(x128 ~ 1/60 sec. ~ 1/10,000 sec.) | |
| IR Distance | IR 30 M | |
| DNR | On/Off | |
| AGC | Auto / Manual | |
| White Balance | Auto WB /Outdoor / Indoor/One Push WB / Manual WB | |
| BLC/HLC | On/Off | |
| Flickerless | On/Off | |
| Brightness | Adjustable (0-96) | |
| Pan/Tilt | Range Horizontal: 360 °(Endless) / Vertical: 90 ° | |
| Speed | H4°~20°/S adjustable, V:4°~12°/S adjustable | |
| Preset | 100 presets 4 pattern, 8 groups could be programmed | |
| Other Scan | Support horizontal scan, frame scan, random scan | |
| Other functions | Auto Flip, Park Position, Power Up | |
| Communication | RS-485 | |
| Protocol | Pelco-D, Pelco-P | |

Designed in Japan

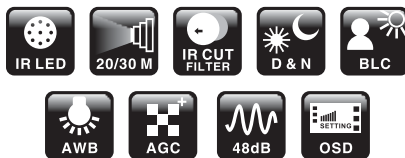

General illumination Color Effects



Low illumination Color Effects



Ir-cut Zoom Camera Daylight Effect
No color cast, No Sub-exposure