



SAMSUNG

Smart Access Control

Vandal Resistant Proximity Standalone Controller



SSA-S1000V

The SSA-S1000V is vandal resistant 125KHz Samsung standalone controller designed to be installed in a location and application where they may be subject to vandalism or tampering.

These products are sealed in solid epoxy and aluminum enclosure, providing reliable indoor/outdoor performance and are water & dust proof (IP68).

- 125KHz Proximity - Samsung Format
- Vandal-Resistant / Water & Dust proof (IP68)
- 512 Users
- Direct control of Door Locks
- Power Fail Safe or Secure (selectable)

Vandal Resistant Proximity Standalone Controller

SSA-S1000V




Specifications

SSA-S1000V	
USER / EVENT BUFFERS	
Total ID Users	512 users
AUTHENTICATION	
Method	RFID
INPUT / OUTPUT	
Input Port	3ea (Exit button, Door sensor, Lock type select)
Output Port	2ea (TR output / DC 12V, Rating Max 300mA Alarm Output, DC 12V, Rating Max. 1A Lock Output)
LED Indicator	5 LED indicator (Red, Green)
Beeper	Piezo buzzer
OPERATIONAL	
Frequency / Format	125KHz / Samsung
ENVIRONMENTAL	
Operating Temperature	-20°C ~ +50°C (-4°F ~ +122°F)
Operating Humidity	Less than 90% RH
Ingress Protection	IP68
Vandal-Resistant	Yes
ELECTRICAL	
Input Voltage / Current	12V DC / Max. 110mA
Power Consumption	2.2W
MECHANICAL	
Color / Material	Silver and black / Polycarbonate & aluminum die casting
Dimensions (WxHxD)	47 x 120 x 26mm (1.85" x 4.72" x 1.02")
Weight	250g (0.55lb) ±10g (0.02lb)

Dimensions

Unit : mm (inch)

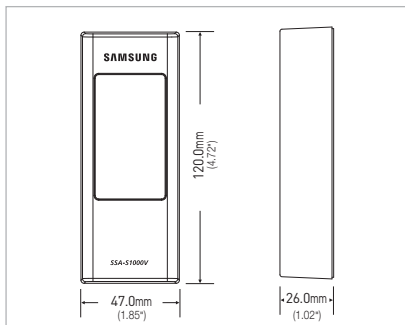

Design and specifications are subject to change without notice.

Compatible Cards (Optional)



The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.



SAMSUNG TECHWIN AMERICA Inc.
100 Challenger Road, Suite 700, Ridgeland Park, NJ 07660, UNITED STATES
Tol Free : 1-877-213-1222 Fax : 1-201-373-0124
www.samsung-security.com

■ DISTRIBUTED BY



www.asi.ind.in

M.E-1011