


## DS-2CC5132P(N)-IRP IR DIS Dome Camera

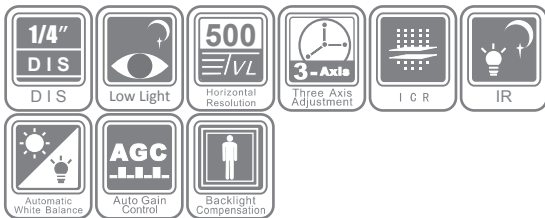

### Key Features

- 1/4" DIS
- 500 TVL resolution
- 20m IR range
- Low illumination
- True day / night
- 3-axis adjustment

### Specifications

DS-2CC5132P(N)-IRP	
<b>Camera</b>	
Image sensor	1/4" DIS
Signal system	PAL / NTSC
Effective pixels	640(H) × 480(V)
Min. illumination	0.1 lux@F1.2, AGC on, 0 lux with IR 0.2 lux@F1.8, AGC on, 0 lux with IR
Shutter time	1/25 (1/30)s ~ 1/15,000s
Lens	2.8mm @F1.8 (6mm, 3.6mm optional) Angle of view: 66.2° (2.8mm)
Lens mount	M12
Day / night	IR cut filter with auto switch
Horizontal resolution	500 TVL
Synchronization	Internal synchronization
Video output	1Vp-p composite output (75 Ω / BNC)
S/N ratio	More than 52 dB
BLC	On
<b>General</b>	
Operating conditions	-40°C ~ 70°C (40°F ~ 158°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%
Power consumption	1W (2.5W max with IR cut filter on)
IR range	approx 10 ~ 20 meters
Dimensions	Φ 89.5 × 69.8mm (Φ 3.52" × 2.75")
Weight	200g (0.44 lbs)

### Available models

DS-2CC5132P-IRP, DS-2CC5132N-IRP

### Dimensions

