

DH-IPC-DB665P/N(-P)

1/3" CCD H.264 Vandal-proof Network Dome Camera



DH-IPC-DB665P: 1/3" CCD, PAL video format, 25fps at D1/VGA

DH-IPC-DB665P-P: 1/3" CCD, PAL video format, 25fps at D1/VGA, PoE


DH-IPC-DB665N: 1/3" CCD, NTSC video format, 30fps at D1/VGA

DH-IPC-DB665N-P: 1/3" CCD, NTSC video format, 30fps at D1/VGA, PoE

Features

- 1/3" SONY Super HAD CCD image sensor
- High-performance TI DaVinci series DSP
- H.264 video compression and JPEG image capture
- 25/30fps at D1/HD1/CIF/VGA resolution
- Dual encoding streams supported
- Multi-zone video detection and privacy masking
- 1 channel analogue video BNC output
- Support Alarm I/O, RS485 interface
- Max 32GB MicroSD card for local storage
- PoE (IEEE802.3af)
- Built-in web server, NVR, DMSS & CMS

Dimensions (mm)

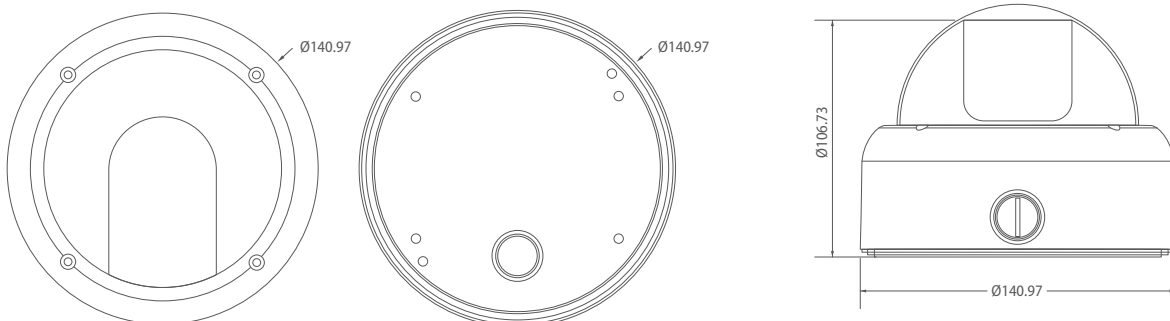

Specifications

Model		DH-IPC-DB665P(-P)	DH-IPC-DB665N(-P)	
General	Processor	TI DaVinci Series DSP		
	Operating System	Embedded LINUX		
	Resource	Simultaneous remote monitoring, local recording and remote control		
	User Interface	WEB, CMS(DSS, PSS)		
Camera	Image Sensor	1/3" SONY Super HAD CCD		
	Effective Pixels	795(H)×596(V)	811(H)×508(V)	
	Horizontal Resolution	540TVL(Color), B/W(600TVL)		
	Electronic Shutter	Auto/Manual, 1/50~1/10000s	Auto/Manual, 1/60~1/10000s	
	Mini. Illumination	0.1LUX/F1.2		
	Signal Noise Ratio	>50dB		
	Gain Control	Auto		
	White Balance	Auto/Manual		
	Lens	M12-mount, 8mm/F1.2, FOV: 42°		
Video	Video Compression	H.264		
	Resolution	D1(704×576) / HD1(352×576) / CIF(352×288) / QCIF(176×144) / VGA(640×480) / QVGA(320×240) / QQVGA(160×120)	D1(704×480) / HD1(352×480) / CIF(352×240) / QCIF176×128) / VGA(640×480) / QVGA(320×240) / QQVGA(160×120)	
	Encoding Speed	Main Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA (1~25fps)	Main Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA (1~30fps)	
		Extra Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA (1~25fps)	Extra Stream: D1/HD1/CIF/QCIF/VGA QVGA/QQVGA (1~30fps)	
	Bit Rate	32K~4Mbps		
	Snapshot	Fastest 1fps JPEG capture		
	Video Format	PAL	NTSC	
	Analogue Video Output	1 channel BNC(1.0Vp-p, 75Ω)		
Audio	Audio Compression	PCM(64Kbps) / G.711a(32Kbps) / AMR(10.2Kbps)		
	Input	1 channel 3.5mm Jack Mic in		
	Output	1 channel 3.5mm Jack Speak out		
Network	Ethernet	RJ-45 (10/100Base-T)		
	Network Functions	HTTP, TCP/IP, ICMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server		
	Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information, Maintenance & Upgrade		
Auxiliary Interface	MicroSD Card	Max 32GB, local storage		
	RS485	PTZ control		
	Alarm	2 Input / 1 Output		
Environmental	Power Supply	DC 12V, PoE (-P model supported)		
	Power Consumption	5W		
	Operating Environment	-10~+55°C, 10%~90%		
	Dimension	Φ141mm×120mm		
	Weight	350g		